APAC Infrastructure Pty Ltd
ABN: 43 615 637 235
1300 952 788
sales@apacinfrastructure.com.au

ATR Guy Wire Kit - Galvanised, Suit ATR50 Tripod Mast

AP-ATR-GWK-GAL

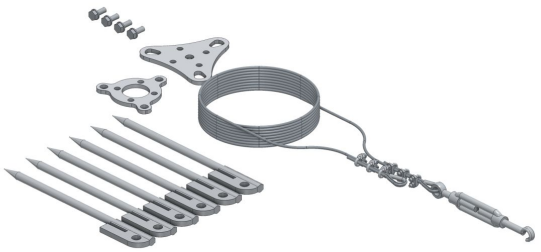

Key Features

- Six 4 mm 7x19 galvanised guy wires
- Head plate and guy plate for the ATM50 pole
- Hook-and-eye turnbuckles, thimbles and grips
- Six 300 mm marquee pegs included
- Included with the ATR50G

Overview

The ATR guy wire kit steadies the ATR50 tripod mast. A head plate bolts to the pole's top cap and a guy plate sits on the second section's collar; from each, three 4 mm 7x19 galvanised wire rope guys run out over the tripod's legs.

Each guy has a thimble eye with three wire rope grips at each end and a hook-and-eye turnbuckle for tensioning. The top guys are cut 5.5 m and the mid guys 3.5 m, longer than an installation needs, so the excess is trimmed or coiled at the peg.

Six 300 mm steel marquee pegs are included for temporary installations; permanent installations can use duckbill anchors instead (not supplied). The kit comes with the ATR50G.

APAC Infrastructure Pty Ltd
ABN: 43 615 637 235
1300 952 788
sales@apacinfrastructure.com.au

Specification

Parameter	AP-ATR-GWK-GAL
Physical Specification	
Materials	**Steel** **Aluminium**

Subcomponents

Quantity	Item	Materials	Material Finish
1	Head Plate, 6 mm, 3 Guy Slots, 4x M8 Holes	Aluminium	Bright/Pickled Finish
1	Guy Plate, 6 mm, 3 Guy Holes	Aluminium	Bright/Pickled Finish
6	300 mm Steel Marquee Peg	Steel	

Quantity	Bundled Components
3	Wire Rope 7x19 - 4 mm Galvanised, 5.5 m Length (AP-FST-WR719-4-5.5)
3	Wire Rope 7x19 - 4 mm Galvanised, 3.5 m Length (AP-FST-WR719-4-3.5)
12	Wire Rope Thimble - Galvanised Steel, 4 mm (AP-FST-TH-4)
6	Turnbuckle with Hook and Eye - Galvanised, M10 (AP-FST-TBHE-10)
36	Wire Rope Grip - Galvanised, 4mm Wire (AP-FST-WRG-4)
4	Hex Bolt, Stainless Steel - M8 x 20mm Standard Thread (AP-FSS-HXB-M8-20)
4	Flat Washer, Stainless Steel - M8 (AP-FSS-FW-M8)

Australian designed and manufactured infrastructure for public safety and first response, built on the Sunshine Coast, Queensland. Need a variation on this design? Our team can engineer it to suit your site.

Contact us

Phone 1300 952 788
Email sales@apacinfrastructure.com.au
Web apacinfrastructure.com.au
ABN 43 615 637 235

Specifications, dimensions and weights are nominal, correct at the date of issue and subject to change without notice. Images are for illustration and may show optional equipment. Confirm suitability for your site, including wind region and mounting surface, with APAC before ordering, and install in accordance with APAC's instructions and the relevant Australian Standards.

Issued 25 November 2026. For the latest version of this datasheet, visit https://apacinfrastructure.com.au/product-catalogue/supports-stabilisers/atr-guy-wire-kit?v=740

© 2026 APAC Infrastructure Pty Ltd. All rights reserved.