
APAC Infrastructure Pty Ltd
ABN: 43 615 637 235
1300 952 788
sales@apacinfrastructure.com.au

Wire Rope 7x19 - 6 mm Galvanised, 10 m Length

AP-FST-WR716-6-10

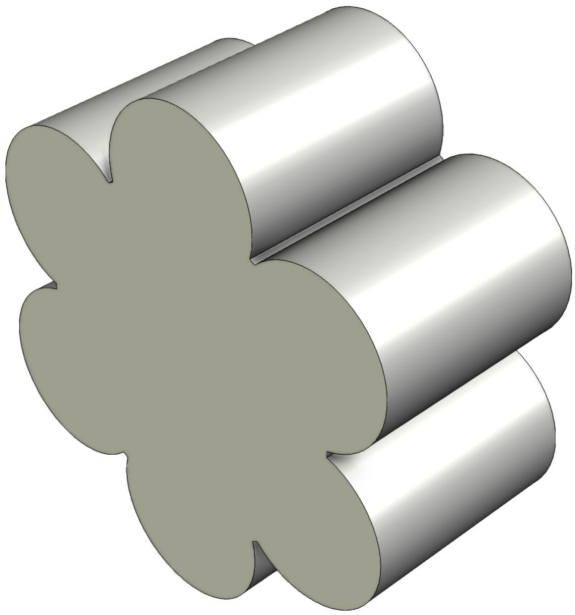

Key Features

- Galvanised or Stainless Steel

Overview

The 7x19 wire rope used in guy wire kits consists of 7 strands, each containing 19 individual wires, which provides flexibility and strength crucial for stabilising and supporting structures such as towers.

This component is typically found as part of APAC guy wire kits.

APAC Infrastructure Pty Ltd
ABN: 43 615 637 235
1300 952 788
sales@apacinfrastructure.com.au

Specification

Parameter	AP-FST-WR716-6-10
Physical Specifications	
Subtype	**Wire Rope**
Size	**6.0 mm**
Materials	**Steel**
Material Finish	**Hot-Dip Galvanised**

APAC Infrastructure Pty Ltd
ABN: 43 615 637 235
1300 952 788
sales@apacinfrastructure.com.au

Variants

Wire Rope 7x19 - 6 mm Galvanised, 10 m Length AP-FST-WR716-6-10 · this datasheet	
Wire Rope 7x19 - 6 mm Galvanised, 12 m Length AP-FST-WR716-6-12	
Wire Rope 7x19 - 6 mm Galvanised, 15 m Length AP-FST-WR716-6-15	
Wire Rope 7x19 - 6 mm Galvanised, 20 m Length AP-FST-WR716-6-20	
Wire Rope 7x19 - 6 mm Galvanised, 25 m Length AP-FST-WR716-6-25	
Wire Rope 7x19 - 6 mm Galvanised, 30 m Length AP-FST-WR716-6-30	
Wire Rope 7x19 - 6 mm Galvanised, 35 m Length AP-FST-WR716-6-35	
Wire Rope 7x19 - 6 mm Galvanised, 40 m Length AP-FST-WR716-6-40	
Wire Rope 7x19 - 6 mm Stainless Steel, 10 m Length AP-FSS-WR716-6-10	
Wire Rope 7x19 - 6 mm Stainless Steel, 12 m Length AP-FSS-WR716-6-12	
Wire Rope 7x19 - 6 mm Stainless Steel, 15 m Length AP-FSS-WR716-6-15	
Wire Rope 7x19 - 6 mm Stainless Steel, 20 m Length AP-FSS-WR716-6-20	
Wire Rope 7x19 - 6 mm Stainless Steel, 25 m Length AP-FSS-WR716-6-25	
Wire Rope 7x19 - 6 mm Stainless Steel, 30 m Length AP-FSS-WR716-6-30	
Wire Rope 7x19 - 6 mm Stainless Steel, 35 m Length AP-FSS-WR716-6-35	
Wire Rope 7x19 - 6 mm Stainless Steel, 40 m Length AP-FSS-WR716-6-40	
Wire Rope 7x19 - 6 mm Galvanised, 45 m Length AP-FST-WR716-6-45	
Wire Rope 7x19 - 6 mm Galvanised, 50 m Length AP-FST-WR716-6-50	
Wire Rope 7x19 - 6 mm Galvanised, 55 m Length AP-FST-WR716-6-55	
Wire Rope 7x19 - 6 mm Stainless Steel, 45 m Length AP-FSS-WR716-6-45	

Wire Rope 7x19 - 6 mm Stainless Steel, 50 m Length	AP-FSS-WR716-6-50
Wire Rope 7x19 - 6 mm Stainless Steel, 55 m Length	AP-FSS-WR716-6-55
Wire Rope 7x19 - 4 mm Galvanised, 5.5 m Length	AP-FST-WR719-4-5.5
Wire Rope 7x19 - 4 mm Galvanised, 3.5 m Length	AP-FST-WR719-4-3.5

Australian designed and manufactured infrastructure for public safety and first response, built on the Sunshine Coast, Queensland. Need a variation on this design? Our team can engineer it to suit your site.

Contact us

Phone 1300 952 788
Email sales@apacinfrastructure.com.au
Web apacinfrastructure.com.au
ABN 43 615 637 235

Specifications, dimensions and weights are nominal, correct at the date of issue and subject to change without notice. Images are for illustration and may show optional equipment. Confirm suitability for your site, including wind region and mounting surface, with APAC before ordering, and install in accordance with APAC's instructions and the relevant Australian Standards.

Issued 5 November 2026. For the latest version of this datasheet, visit https://apacinfrastructure.com.au/product-catalogue/fixings/wire-rope-7x19?v=445

© 2026 APAC Infrastructure Pty Ltd. All rights reserved.